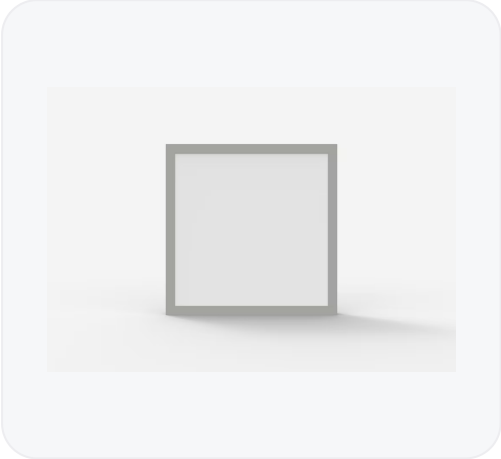


INDOOR LİGHTİNG

# PANEL LED R 594x594

**Product Code** 103LED39.8W84-7W1

## Description

| | |
|---|---|
| Body | Metal sheet body-frame |
| Diffuser/Optics | UV protected PS opal diffuser |
| IP Protection Class | IP40/20 |
| Impact Resistance Class | - |
| Light Source | Mid Power Led |
| Usage Type | Drywall |
| Installation Dimension (mm) | 550x570 |
| Optional Features | 3000K, 6500K |
| | Clip-in 599x599 mm, Mineral wool 594x594 mm |
| | - |
| | - |
| | Dali |
| | IP54_20, IP54 |
| | 3-hour emergency kit |

## Technical Specifications

| | |
|---|---|
| Consumption Power | 39.8 W |
| Color Temperature (CCT) | 4000 K |
| Luminaire Lumen | 5292 lm |
| Luminaire Efficiency | 133.0 lm/W |
| Color Rendering Index | >80 |
| Color Tolerance (SDCM) | MacAdam 3 |
| Led Life | L80 50000 hours ta: 25 ℃ ±1 '%'40RH |
| Operating Temperature | -20...+45 °C |
| Output Current | 1050 mA |
| Power Factor | 0.95 |
| Input Voltage | 220 - 240 V |
| Input Frequency | 50 / 60 Hz |



This PDF was generated automatically upon your request; technical data may vary by ±10%.