


INDOOR LIGHTING

HYGIENIC LED R 294x1194

Product Code **141LED40.3W84-**

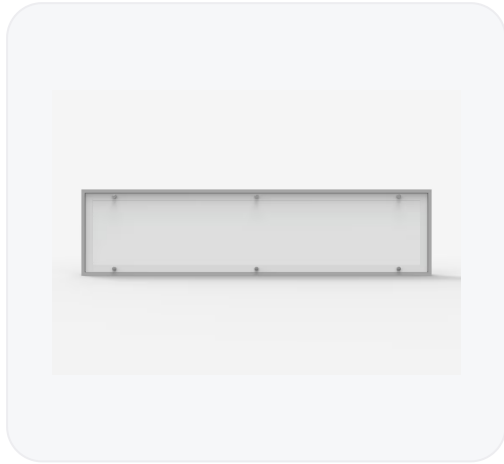

Description

Body	Metal sheet body-frame, Transparent tempered glass
Diffuser/Optics	UV protected PS opal diffuser
IP Protection Class	IP65
Impact Resistance Class	-
Light Source	Mid Power Led
Usage Type	Drywall
Installation Dimension (mm)	?
Optional Features	3000K, 6500K
	Clip-in 299x1199 mm, Mineral wool 294x1194 mm
	-
	-
	Dali
	-
	3-hour emergency kit

Technical Specifications

Consumption Power	40.3 W
Color Temperature (CCT)	4000 K
Luminaire Lumen	4527 lm
Luminaire Efficiency	112.3 lm/W
Color Rendering Index	>80
Color Tolerance (SDCM)	MacAdam 3
Led Life	L80 50000 hours ta: 25 °C ±1 '% '40RH
Operating Temperature	-20...+45 °C
Output Current	1050 mA
Power Factor	0.95
Input Voltage	220 - 240 V
Input Frequency	50 / 60 Hz

This PDF was generated automatically upon your request; technical data may vary by ±10%.